

S320

Display



EASY TO USE
User-friendly design



POWER SUPPLY
Flexible power supply



ALARM
Optional alarm settings



USB INTERFACE
For configuration with S4C software



EASY INSTALLATION
Wall or panel mountable casing



SIGNAL INPUTS
Digital and analog input



Benefits



- ✓ Cost-efficient display unit for live readings on a big display
- ✓ Inputs for sensor connection:
 - 1 input for flow / dew point sensor
 - 1 input for analog sensors
- ✓ 2 relay outputs for alarm with optional alarm on display
- ✓ USB interface for configuration with S4C software
- ✓ Wall or panel mountable casing

Display Solutions for Sensors

The S320 Display provides a cost efficient display solution for industrial applications where information from a single difficult-to-access sensor is required. The display has an input for SUTO flow meters and dew point sensors.

It can display all relevant parameters (flow, dew point, pressure, temperature, power consumption, compressor status etc.) in a compressed air system.

Dimensions

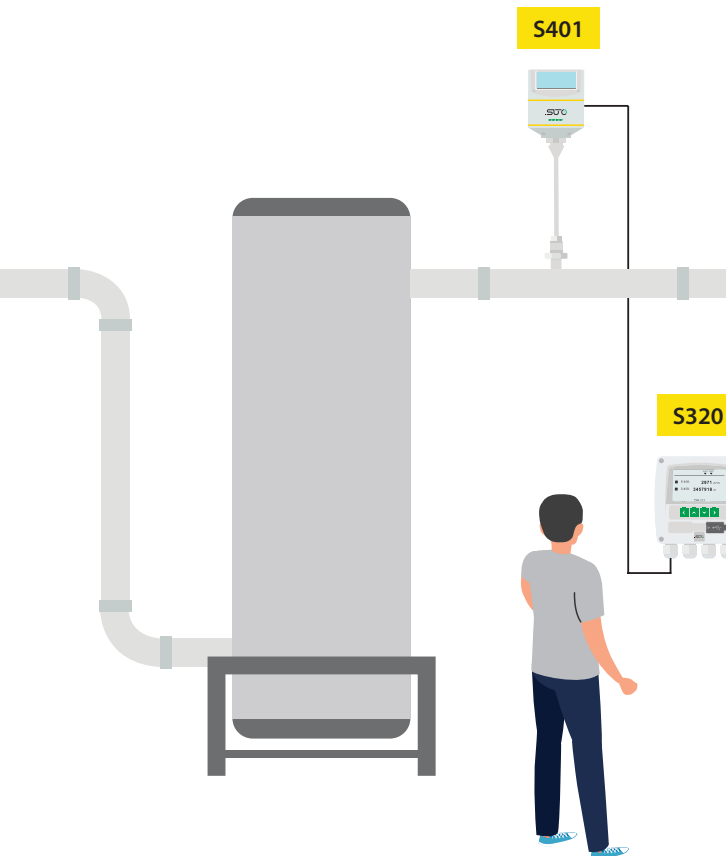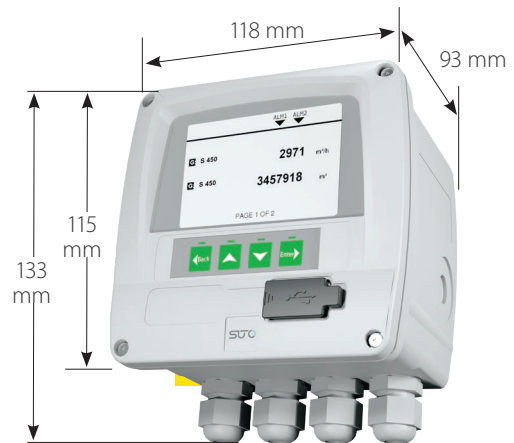

Inputs

- 1 input for SUTO flow/ dew point sensors
- 1 input for analog sensor (0 ... 20 mA, 0 ... 10V)

Outputs

- Communication Interfaces USB port
- Other Signals / Features
- 2 Alarm relay outputs

Technical Data

Signal / Interface & Supply

Input signals

Digital input	1 x SDI for dew point and flow sensors
Analog input	1 x 0 ... 20 mA or 1 x 4 ... 20 mA or
Pulse input	1 x 0 ... 10 V

Output signals

Alarm output	2 relays, 230 VAC, 3 A
--------------	------------------------

Electrical data

	100 ... 240 VAC, 15 VA (option A1640)
Power supply	18 ... 30 VDC, 15 VA (option A1641)
Sensor supply	24 V, 10 W

Data interface

Connection	USB to PC
Operation	Keyboard, 4 keys

General data

Configuration

PC Software	S4C-Display software
-------------	----------------------

Display

Integrated	Graphic display, 220 x 140 pixels with back light
------------	---

Material

Housing	ABS
---------	-----

Miscellaneous

Protection class	IP65
Approvals	CE
Weight	0.52 kg
Housing	Panel, wall mountable
Dimensions	See dimensional drawing
Cable entry diameter	4.5 ... 8 mm
Cable	Supply: AWG12 ... AWG24, 0.2 ... 2.5 mm ² ; Signals: AWG16 ... AWG28, 0.14 ... 1.5 mm ²
Weight	0.52 kg

Operating conditions

Ambient temperature	0 ... +50°C
Ambient humidity	<90%
Storage temperature	-20 ... +70°C
Transport temperature	-30 ... +70°C

Ordering

Please use the following table to assist in placing your order with our sales staff.

S320 Display

Order No.	Power supply	Casing	Description
-----------	--------------	--------	-------------

D500 0320			S320 base unit, panel version, 1 input for SUTO sensor, 1 analog input
A1640	A		Power supply 100 ... 240 VAC, 15 VA, 2 relay outputs
A1641	B		Power supply 18 ... 30 VDC, 15 VA, 2 relay outputs
		A	None
A1645		B	Wall mountable casing with 4 cable glands

Accessories

A553 0104			Sensor cable 5 m, with M12 connector, open wires, AWG24 (0.2 mm ²)
A553 0105			Sensor cable 10 m, with M12 connector, open wires, AWG24 (0.2 mm ²)
A553 0106			Power cable with mains plug, 1.8 m